


Fujitsu split de perete ON/OFF -ASY12USB

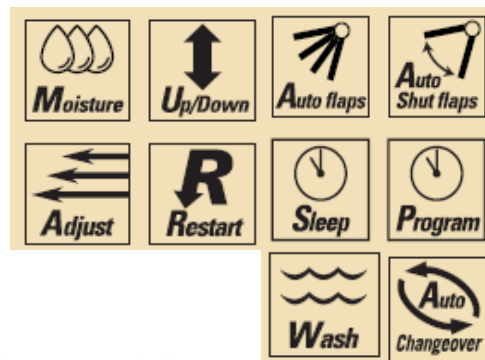

Rank
A

ASY12UB

⊖ 3.70kW / 12,600BTU/h

⊕ 4.00kW / 13,600BTU/h



For ASY12UB

- Compacte, cu un design care economiseste spatiu
- Schimbator de caldura protejat de coroziune
- Compresor clasic ce economiseste energie ,avand un coeficient EER/COP ridicat
- Design imbunatatit al ventilatorului pentru asigurarea unui randament sporit
- Distributie a aerului optimizata in toate coturile camerei datorita configuratiei Supar Vane
- Filtru de praf lavabil
- Functionare in modul silentios
- Functionare silentioasa in modul somn asigurand un confort sporit persoanelor care dorm

Date tehnice:

Model	Unitate interioara		ASY12USB
	Unitate exterioara		AOY12UB
Clasa energetica (incalzire/racire)			A/A
Capacitate	Racire	kw	3,7
	Incalzire		4,00
	Racire	BTU/h	12600
	Incalzire		13600
Eliminarea umiditatii		l/h	1.9
Nivel de zgomot (interior)	Racire/H/M/L/Q	dB(A)	45/41/35/29
Nivel de zgomot (exterior)	Racire		48
Ventilare	Interior	m ³ /h	700
	Exterior		1,710
Tensiune de alimentare		V/Ø/Hz	230/1/50
Curent alimentare	Racire	A	5,0
	Incalzire		4,6
Putere consumata	Racire	kw	1,13
	Incalzire		1,04
EER	Racire	W/W	3,27
COP	Incalzire		3,85
Dimensiuni HxWxD	Interior	mm	275x790x215
		kg(lbs)	9(20)
	Exterior	mm	535x780x250
		kg(lbs)	35(77)
Dimensiune teva (micaØ mareØ)		mm	6,35/9,52
Lungime teava max/Diferenta de nivel		m	15/5
Intervalul permis al temperaturii exterioare	Racire	°C	21-43
	Incalzire		-5..+24
Refrigerant			R410A